

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

**(10) International Publication Number**  
**WO 02/067236 A2**


PCT

- Published:**

without international search report and to be republished upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD OF AND UNIT FOR DISPLAYING AN IMAGE IN SUB-FIELDS

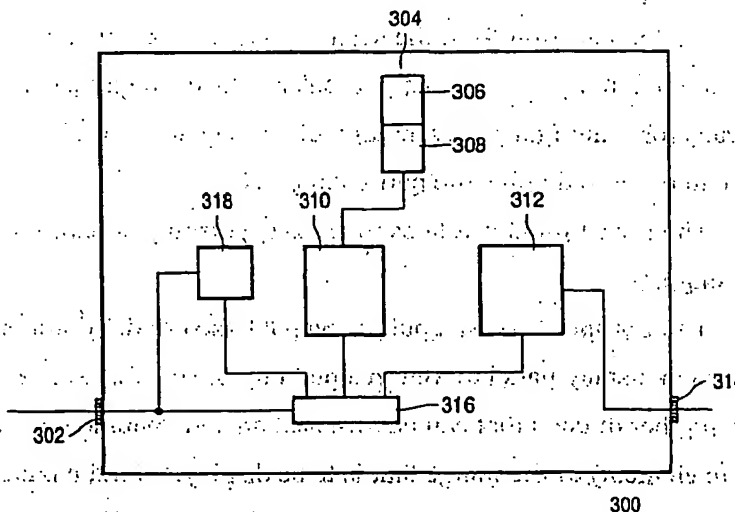

(57) **Abstract:** An image processing unit (300) for processing an image that is to be displayed in a plurality of sub-fields on a plasma display panel (406) has storage means (304) for storing the set of combinations of sub-fields that are available as intensity levels and selection means (310) for selecting from the storage means a particular combination for a pixel to be displayed. According to the invention, the difference regarding sub-fields between a first one of the combinations representing a first available illumination level and a second one of the combinations representing the next higher illumination level has been limited, the limiting including control such that only a limited number of the sub-fields that are switched on in the first one of the combinations is not switched on in the second one of the combinations.

**WO 02/067236 A2**

**BEST AVAILABLE COPY**

## Method of and unit for displaying an image in sub-fields

The invention relates to a method of displaying an image on a display device in a plurality of periods called sub-fields, where the display device is capable of generating in each of the sub-fields a respective illumination level, the method comprising the steps of:

- generating a set of combinations of sub-fields, each element of the set representing a  
5 respective available illumination level,
- for pixels of the image selecting particular combinations of sub-fields from the set in conformity with the intensity value of the respective pixels, and
- for each of these pixels sending a representation of the selected combination of sub-fields to the display device in order to display the particular pixel.

10 The invention also relates to an image processing unit for processing an image to be displayed on a display device in a plurality of periods called sub-fields, wherein the display device is capable of generating in each of the sub-fields a respective illumination level, the image display unit comprising:

- storage means for storing a set of combinations of sub-fields, each element of the set  
15 corresponding to a respective available illumination level,
- selection means for selecting from the set a particular combination of sub-fields in conformity with the intensity value of a particular pixel of the image, and
- sending means for sending a representation of the selected combination of sub-fields to the display device in order to display the particular pixel.

20 The invention also relates to an image display apparatus comprising such an image processing unit.

The European patent application published under number EP 884 717 A1 describes a plasma display panel driven in a plurality of sub-fields. A plasma display panel is made up of a number of cells that can be switched on and switched off. A cell corresponds to  
25 a pixel (picture element) of the image that is to be displayed on the panel. Three phases can be distinguished in the operation of the plasma display panel. The first phase is the erasure phase in which the memories of all cells of the panel are erased. The second phase is the addressing phase in which the cells of the panel that are to be switched on are conditioned by setting appropriate voltages on their electrodes. The third phase is the sustain phase in which

sustain pulses are applied to the cells which cause the addressed cells to emit light for the duration of the sustain phase. The plasma display panel emits light during this sustain phase. The three phases together are called a sub-field period or simply a sub-field. A single image, or frame, is displayed on the panel in a number of successive sub-field periods. A cell may be  
5 switched on for one or more of the sub-field periods. The light emitted by a cell in the sub-field periods in which it was switched on is integrated in the eye of the viewer who perceives a corresponding intensity for that cell. In a particular sub-field period the sustain phase is maintained for a particular time, resulting in a particular illumination level of the activated cells. Typically, different sub-fields have a different duration of their sustain phase. A sub-  
10 field is given a coefficient of weight to express its contribution to the light emitted by the panel during the whole frame period. An example is a plasma display panel with 6 sub-fields having coefficients of weight of 1, 2, 4, 8, 16 and 32, respectively. Selecting the appropriate sub-fields in which a cell is switched on, enables 64 different intensity levels to be realized in displaying an image on this panel. The plasma display panel is then driven by using binary  
15 code words of 6 bits each, such a code word indicating the intensity level of a pixel in binary form.

In driving a plasma display panel, the frame period, i.e. the period between two successive images, is separated into a number of sub-field periods. During each of these  
20 sub-field periods a cell may or may not be switched on and integration over the sub-field periods results in a perceived intensity level of the pixel corresponding to this cell. Instead of displaying a pixel at a given moment in time, on a plasma display panel the pixel seems to be displayed as a series of sub-pixels shifted in time with respect to each other. This may cause artifacts if a series of images contains a moving object. The eyes of the viewer track the moving object, while the elements of the object emit light at various different moments.  
25 These temporal differences between parts of the object are translated into spatial differences by the tracking eye, resulting in artifacts like false contours. Another artifact is motion blur. Such occurs if the intensity level of the pixels of a moving object is generated in a large number of sub-fields. It is then clearly noticeable that the light of a pixel has been emitted at the various different moments.

30 The motion of an object needs to be taken into account when displaying the object in a number of sub-fields. For each next sub-field, the object must be moved a little. Motion compensation techniques are used to calculate a corrected position for the sub-pixels in the sub-fields. In some circumstances the motion compensation is not fully reliable and may produce erroneous results, for example, in an area of the image containing little detail.

The erroneous results lead to motion compensation where this should not be done. This also gives motion artifacts that are very visible.

An artifact is most noticeable if two neighboring pixels have a small difference in intensity level while for one of the pixels the sub-field with the largest coefficient of weight is on and for the other pixel this sub-field is off. In case of the example of the binary code above, the code word for one pixel has the most significant bit on and the code word for the other pixel has the most significant bit off. Any error in the calculated position of a sub-field, i.e. any motion artifact involving these pixels, will then cause a relatively large artifact in the displayed image. An example of the occurrence of a motion artifact in the plasma display panel with 6 sub-fields is the transition from intensity level '31' to intensity level '32'. The level '31' has the 5 lower sub-fields switched on and the highest sub-field switched off. For the level '32', the 5 lower sub-fields are switched off and the highest sub-field is switched on. This causes a very visible artifact if there is motion involved. The device described in EP 884 717 A1 tries to mitigate motion artifacts by restricting the code words that are used. This known device employs more sub-fields than necessary for realizing the required set of intensity values. The resultant set of code words for expressing the intensity value is redundant, i.e. for a given intensity value more than one code word is available. From this redundant set there is formed a subset for which those code words are selected that give the fewest motion artifacts for expressing a difference between the intensity values. This subset is created by searching the original set and determining what the effect on the artifacts may be for a difference between a given code word and each of the other code words.

It is an object of the invention to provide a method as described in the preamble which offers an improved reduction of artifacts. This object is achieved according to the invention by a method that is characterized in that the set is generated while limiting a difference regarding sub-fields between a first one of the combinations representing a first available illumination level and a second one of the combinations representing the next higher illumination level in the set, the limiting including control such that only a limited number of the sub-fields that are switched on in the first one of the combinations is not switched on in the second one of the combinations. For creating a set with a comparatively large number of different available illumination levels, it is desirable that the combination for the next higher level may have a number of sub-fields switched off that are switched on for the given level. This provides an amount of freedom to create the comparatively large number of different levels. Limiting the number of sub-fields that are switched off for the

next higher level ensures that the set of combinations of sub-fields according to the invention will suffer less from dynamic false contours. As described above, an area with a small spatial graduation, i.e. an area where neighboring pixels have a very small mutual difference in intensity level, may suffer heavily from motion artifacts like false contours. Because in such an area the invention effectively controls the mutual differences in sub-fields between neighboring pixels, the chance of motion artifacts is reduced. There are fewer sub-fields that change value between pixels and, therefore, fewer timing errors leading to the artifacts are likely to occur.

A version of the method according to the invention is described in claim 2.

10 Allowing that two of the sub-fields that are switched on for a given intensity are no longer switched on for the next higher level provides a good balance between the number of available combinations of sub-fields and the reduction of dynamic false contours in the case of motion.

A further version of the method according to the invention is described in claim 3. Allowing that only one of the sub-fields that are switched on for a given intensity is no longer switched on for the next higher level provides a good balance between the number of available combinations of sub-fields and the reduction of dynamic false contours in the case of motion at comparatively high speeds.

Another version of the method according to the invention is described in claim 4. By restricting the differences between a combination of sub-fields for a given illumination level and the combination of sub-fields for the next higher level to differences in sub-fields that are adjacent in time, motion artifacts as described above are reduced further. Any difference in time between a pixel of a given intensity level and a pixel of the next higher level will be small, thus further reducing the chance of a motion artifact.

25 A further version yet of the method according to the invention is described in claim 5. It is advantageous to generate the available intensity levels in such a way that they are uniform in the perception of the viewer. The reduced number of levels, when compared with a binary distribution, is thus used efficiently in view of the perceived quality of the image.

30 Another version still of the method according to the invention is described in claim 6. This distribution of available intensity levels corresponds to the inverse of the gamma filtering that is applied to video signals produced by a camera. Therefore, this embodiment does not require the separate step of inverse gamma filtering as applied in the known method.

A further version of the method according to the invention is described in claim 7. This version allows that the combination of sub-fields for a pixel of a still image is selected from an overall set containing a large number of available illumination levels and that the combination of sub-fields for a pixel from an image containing a moving object is selected from a set with a limited number of available illumination levels suffering less from motion artifacts. In this way, a still image which will not suffer from motion artifacts since there is no motion, is displayed with a large number of intensity levels whereas only an image with motion is displayed with the reduced number intensity levels.

A final version of the method according to the invention is described in claim 8. According to this version only the moving object itself is displayed with the reduced number of intensity levels while the non-moving parts of the image are displayed with the higher number of intensity levels.

It is a further object of the invention to provide an image processing unit as described in the preamble which offers an improved reduction of artifacts. This object is achieved according to the invention by an image processing unit that is characterized in that in the set a difference regarding sub-fields between a first one of the combinations representing a first available illumination level and a second one of the combinations representing the next higher illumination level in the set has been limited, the limiting including control such that only a limited number of the sub-fields that are switched on in the first one of the combinations is not switched on in the second one of the combinations.

The invention and its attendant advantages will be further elucidated with the aid of exemplary versions and embodiments and the accompanying schematic drawings, wherein:

Figure 1 schematically shows a field period with 6 sub-fields,

Figure 2 graphically shows the intensity levels of Table I and Table II,

Figure 3 schematically shows the most important elements of an image, and

Figure 4 shows the most important elements of an image display apparatus.

Corresponding features in the various Figures are denoted by the same reference symbols.

Figure 1 schematically shows a field period with 6 sub-fields. The field period 102, also called the frame period, is the period in which a single image or frame is displayed on the display panel. In this example, the field period 102 consists of 6 sub-fields denoted by references 104-114. In a sub-field a cell of the display panel may be switched on in order to

produce an amount of light. Each sub-field starts with an erasure phase in which the memories of all cells are erased. The next phase in the sub-field is the addressing phase in which the cells that are to be switched on for emitting light in this particular sub-field are conditioned. In a subsequent third phase of the sub-field which is called the sustain phase  
5 sustain pulses are applied to the cells. This causes the cells that have been addressed to emit light during the sustain phase. The organization of these phases is shown in Figure 1 where time runs from left to right. For example, sub-field 108 has an erasure phase 116, an addressing phase 118 and a sustain phase 120. It is to be noted that in some panels the sub-field ends with the erasure phase rather than starting with it. However, this is of no  
10 significance to the invention which can be applied in either case.

The perceived intensity of a pixel of a displayed image is determined by controlling during which of the sub-fields the cell corresponding to the pixel is switched on. The light emitted during the various sub-fields in which a cell is switched on is integrated in the eyes of the viewer, thus resulting in a given intensity of the corresponding pixel. A sub-  
15 field has a coefficient of weight indicating its relative contribution to the emitted light. An example is a plasma display panel with 6 sub-fields having coefficients of weight of 1, 2, 4, 8, 16 and 32, respectively. By selecting the appropriate combination of sub-fields in which a cell is switched on, 64 different intensity levels can be realized in displaying an image on this panel. The plasma display panel is then driven by using binary code words of 6 bits each,  
20 such a code word indicating the intensity level of a pixel in binary form.

A particular realization of the invention uses a plasma display panel that is driven in 8 sub-fields. Table I below shows the set of available intensity levels for displaying an image in this embodiment. It shows the weights that have been chosen for each of the sub-fields. Furthermore, the order of the sub-fields in the field period is shown: the left sub-field  
25 in the table is the first one in the field period, the neighboring sub-field is the second and so on, ending with the extreme right sub-field which is the last one in the field period. Table I shows 21 available illumination levels for realizing the desired intensity level. For each level there are indicated: its sequential number, its relative intensity level, and in what sub-fields the panel must be ignited to realize the particular level.

Level Number	Level Intensity	Sub-field weights							
		4	10	30	54	91	42	18	6
0	0								
1	4	x							
2	10	x							x
3	16		x						x
4	20	x	x						x
5	32	x	x					x	
6	38	x	x					x	x
7	58	x		x				x	x
8	64		x	x				x	x
9	68	x	x	x				x	x
10	92	x	x	x			x		x
11	104	x	x	x			x	x	
12	110	x	x	x			x	x	x
13	134	x	x		x		x	x	x
14	154	x		x	x		x	x	x
15	160		x	x	x		x	x	x
16	164	x	x	x	x		x	x	x
17	213	x	x	x	x	x		x	x
18	237	x	x	x	x	x	x		x
19	249	x	x	x	x	x	x	x	
20	255	x	x	x	x	x	x	x	x

Table I: Set of available intensity levels according to the invention

5

The main characteristic of the set of available intensity levels of Table I is that between a certain intensity level and the next higher level at most one sub-field is switched off. For example, to generate level 10 all sub-fields that are used for level 9 are now also used, with the exception of the 7<sup>th</sup> sub-field. Another example is level 11 where all sub-fields that are used for level 10 are again used. By limiting the number of sub-fields that are

10



switched off for the next higher level, dynamic false contours are suppressed since fewer errors can occur in images with motion.

5 In addition to limiting the number of sub-fields that are switched off, the set of available levels of Table I has a further characteristic that further improves the reduction of motion artifacts. This further characteristic is optional and functions in addition to the above limitation. This further characteristic is to limit differences between two neighboring intensity levels to adjacent sub-fields. So if a difference between two neighboring levels involves two sub-fields, these sub-fields are adjacent. Adjacent sub-fields are ignited successively in time, that is, with a comparatively small difference in time. This makes that 10 any timing errors between these sub-fields will be small and will not easily lead to motion artifacts. An example is the difference between level 9 and level 10: level 9 has the 6<sup>th</sup> sub-field off and the 7<sup>th</sup> sub-field on while level 10 has the 6<sup>th</sup> sub-field on and the 7<sup>th</sup> sub-field off. As described above, adjacent sub-fields in the table denote sub-fields that directly succeed each other in the order of sub-fields in the field period.

15 Table II below shows an alternative set of available intensity levels.

Level Number	Level Intensity	Sub-field weights							
		4	11	27	57	87	42	19	8
0	0								
1	4	x							
2	12	x							x
3	19		x						x
4	23	x	x						x
5	34	x	x					x	
6	42	x	x					x	x
7	54			x				x	x
8	58	x		x				x	x
9	65		x	x				x	x
10	69	x	x	x				x	x
11	84	x	x	x			x		
12	92	x	x	x			x		x
13	103	x	x	x			x	x	
14	111	x	x	x			x	x	x
15	130	x			x		x	x	x
16	141	x	x		x		x	x	x
17	157	x		x	x		x	x	x
18	168	x	x	x	x		x	x	x
19	194	x	x	x	x	x			x
20	213	x	x	x	x	x		x	x
21	236	x	x	x	x	x	x		x
22	255	x	x	x	x	x	x	x	x

Table II: Alternative set of available intensity levels according to the invention

5

In the set of Table II, the limitation regarding the sub-fields that are switched off for the next higher level is somewhat relaxed. The main characteristic of the set of available intensity levels of Table II is that between a certain intensity level and the next

higher intensity level at most two sub-fields are switched off. For example, to generate level 15 all sub-fields that are used for level 14 are now also used, with the exception of the 2<sup>nd</sup> and 3<sup>rd</sup> sub-field. Also in this Table II, if multiple sub-fields are different between two neighboring intensity levels, these multiple sub-fields are positioned adjacent each other.

- 5 Relaxing the limitation provides a greater freedom in defining the intensity levels. This greater freedom may be used to generate a larger number of different levels. The example of Table II has 2 more levels than the example of Table I. Furthermore, the greater freedom may be used to make a better distribution of the intensity level.

In an embodiment of the method and unit according to the invention, the set of  
10 Table I is extended with a number of additional levels that can be generated with the chosen sub-field weights. The additional levels are not limited regarding their differences with other levels and provide for an increase of the available intensity levels that can be used for displaying an image. Thus, the extended set contains the original set of Table I with the sub-field limitation and the additional set without such limitation. Now, in this embodiment the  
15 images to be displayed are analyzed and it is determined whether the images involve the display of motion or whether they involve still images. A simple motion detector can be used for this purpose, for example, as described by I. Kawahara and K. Sekimoto in 'Dynamic Gray-Scale Control to Reduce Motion Picture Disturbance of High-resolution PDP', SID  
1999, page 166. If it is determined that there is no motion, the available levels of the  
20 extended set are used to display the desired intensity in the image. However, if the presence of motion is detected, the available levels of the original set are used thus reducing the dynamic false contours that may appear because of the motion. As an alternative to the motion detector, a more complex motion estimator can be used. Such a motion estimator is generally known from the art and provides details as to what objects in the image are moving  
25 and it can even indicate at what speeds they are moving. In this respect see, for example, 'True motion estimation with 3-D recursive search block-matching' by G. de Haan, IEEE Transactions on Circuits and Systems for Video Technology, Vol. 3, No. 5, October 1993, pp. 368-388, and 'IC for motion-compensated de-interlacing, noise reduction and picture rate conversion' by G. de Haan, IEEE Transactions on Consumer Electronics, Vol. 45, August  
30 1999, pp. 617-624. For displaying an image in the embodiment using a motion estimator, a difference is made between pixels belonging to a moving object and pixel belonging to the background that is not moving. For the display of pixels of the moving object, only intensity levels of the original set are used, while intensity levels of the whole extended set are used for the pixels at rest. In this way, parts that do not move are displayed with a comparatively

large number of intensity levels, thus providing a high quality display. Only the moving parts are displayed with the reduced number of intensity levels, sacrificing a number of intensity levels in exchange for a reduction of dynamic false contours.

An embodiment with an extended set of intensity levels can also use the Table II. An extended set may have different kinds of combinations regarding the limitation on the changes of sub-fields between neighboring intensity levels. In a further embodiment, the extended set may have a first subset with combinations of sub-fields where at most one sub-field is allowed to be switched off for the next higher level (as in Table I), a second subset where at most two sub-fields are allowed to be switched off for the next higher level (as in Table II) and a third sub-set without any limitation. Note that the first sub-set is a sub-set of the second sub-set and that both are a sub-set of the third sub-set. What combinations are available for a given pixel, i.e. from which sub-set combinations may be selected, is then dependent on the speed at which this pixel moves. If the pixel is at rest, the third sub-set may be used, i.e. all levels are available. If the pixel moves at a comparatively low speed, the second sub-set is used and if the pixel moves at a comparatively high speed, the first sub-set is used. In this way, an improved balance is achieved between the reduction of available intensity levels and the reduction of dynamic false contours.

Figure 2 graphically shows the intensity levels of Table I and Table II. The number of intensity levels in these tables is smaller than what could be realized with 8 sub-fields with a binary distribution of the coefficients of weight. In order to use the available number of levels as efficiently as possible, in particular to display the gray scales of an image as well as possible, the levels have been selected uniformly on a perceptual scale. This means that the perceived luminance difference between any two intensity levels is roughly the same. The different levels are then close to each other for low intensity levels, i.e. dark areas of an image, and further apart for high intensity levels, i.e. the bright areas of an image. This is advantageous regarding the perception of the human viewer who can see smaller luminance differences in low intensity areas than in high intensity areas.

An example of a perceptual scale is the one that has been adopted by the CIE (Commission Internationale de l'Éclairage) as standard function. This function  $L^*$  ( $L^*$ -star) is defined as follows:

$$L^* = \begin{cases} 903.3 \frac{L}{L_n}, & \frac{L}{L_n} \leq 0.008856 \\ 116 \left( \frac{L}{L_n} \right)^{\frac{1}{3}} - 16, & 0.008856 < \frac{L}{L_n} \end{cases} \quad (1)$$

wherein:

L is the luminance

5 L<sub>n</sub> is the luminance of the white reference

L\* is the perceived luminance, also called lightness.

A particular advantageous distribution of the intensity levels is to position the levels on a so-called gamma correction curve. Video signals produced by a camera are passed through a gamma filter. Therefore, incoming video signals that are to be displayed need to be gamma corrected using an inverse filter. Now, a CRT (cathode ray tube) intrinsically has such filtering, because the relation between luminance output and video signal voltage input is approximately a gamma correction curve. A plasma display panel, however, has a linear relation between the luminance output and the video input. Therefore, a system for displaying an image on a plasma display panel needs a gamma correction filter (see, for example, block 102 in Figure 1A of EP 884 717 A1). Now, by positioning the selected levels on a gamma correction curve, the gamma correction is applied by directly using the defined levels and the explicit step of gamma correction can be avoided. The gamma correction curve is given by the following formula:

$$20 \quad L = x^\gamma \quad (2)$$

wherein:

L is the output luminance

x is the number of the intensity level

25  $\gamma$  is a constant of a value between 2 and 3.

The value of  $\gamma$  is typically chosen to be 2.3 but may be different for different applications or for different geographical regions.

In Figure 2 the horizontal axis indicates the available levels and the vertical axis the intensity. The marks indicate the intensity of the particular level. The graph

approximates the gamma correction curve. Another choice of the coefficients of weight for one or more sub-fields will result in a different graph.

The above embodiment has 21 intensity levels available to display a pixel if Table I is applied and 23 intensity levels if Table II is applied. To simulate the display of an image with a higher number of levels, a technique called error diffusion can be applied. Error diffusion is a serial process that proceeds as follows: at each pixel the desired level is rounded to the nearest quantization level, which is the output. The error is computed by subtracting the quantized value from the desired value. This error is 'diffused' by adding fractions of it to the desired values of nearby unquantized pixels. The precise pattern of how the error is distributed determines the resultant patterns in the image. Error diffusion is a well known technique and is, for instance, described in the article by R. W. Floyd and L. Steinberg, called 'Adaptive algorithm for spatial grey scale', SID Int. Sym. Dig. Tech. Papers, pp. 36-37, 1975. Techniques other than error diffusion may be used to improve the perceived number of gray levels.

The above embodiments include a set of 21 or 23 different intensity levels for displaying an image. The invention allows the use of sets with another number of intensity levels. This can be realized, for example, by defining other coefficients of weight and other combinations of sub-fields. Levels other than those shown in Table I and Table II can then be generated. Alternatively, a panel can be used that can be operated in more than 8 sub-fields. The following table shows an example for the available levels for such a panel according to the invention.

Level Number	Level Intensity	Sub-field weights									
		1	4	12	32	62	2	6	18	40	78
0	0										
1	1	x									
2	3	x					x				
3	6		x				x				
4	7	x	x				x				
5	11	x	x					x			
6	13	x	x				x	x			
7	21	x		x			x	x			
8	24		x	x			x	x			
9	25	x	x	x			x	x			
10	37	x	x	x			x		x		
11	41	x	x	x				x	x		
12	43	x	x	x			x	x	x		
13	63	x	x		x		x	x	x		
14	70			x	x		x	x	x		
15	75	x	x	x	x		x	x	x		
16	97	x	x	x	x		x	x		x	
17	107	x	x	x	x				x	x	
18	115	x	x	x	x		x	x	x	x	
19	145	x	x	x		x	x	x	x	x	
20	161	x			x	x	x	x	x	x	
21	172			x	x	x	x	x	x	x	
22	177	x	x	x	x	x	x	x	x	x	
23	215	x	x	x	x	x	x	x	x		x
24	231	x	x	x	x	x	x			x	x
25	247	x	x	x	x	x			x	x	x
26	255	x	x	x	x	x	x	x	x	x	x

Table III: Set of available intensity levels for a panel with 10 sub-fields

Figure 3 schematically shows the most important elements of an image processing unit according to the invention. The image processing unit 300 has an input 302 for receiving the pixels of an image to be processed for display. The image processing unit 300 has storage means 304 for storing the combinations of sub-fields that are available for displaying the image. The storage means 304 may have different part for storing combinations of sub-fields with different characteristics. In the example of Figure 2, the storage means 304 has a first part 306 for storing the combinations of sub-fields that are to be used in the case of motion and a second part 308 for storing additional combinations. These combinations with different characteristics have been described above. The image processing unit 300 also has selection means 310 that selects for a given pixel the appropriate combination of sub-fields from the storage means 304 in order to display that pixel as much as possible in conformity with its desired intensity. The image processing unit 300 also has sending means 312 for sending the selected combination of sub-fields via an output 314 to a display device. In order to control the operation of the various elements, the image processing unit 300 has a control unit 316. The image processing unit 300 may be implemented with a processor and a memory according to a known computer architecture. The various units are then implemented as software modules for performing the required function.

The image processing unit 300 optionally has motion means 318 to detect motion in the images to be displayed. The selection means 310 then select the combination of sub-fields for a particular pixel in dependence on whether that pixel is in motion or even in dependence on the speed of motion of the pixel. The motion means 318 may be a simple motion detector that compares two subsequent images and decides that motion exists if the two images differ sufficiently. Alternatively, the motion means 318 may be a motion estimator that is able to detect moving objects and their speed between two successive images. In the latter case only the pixels of a moving object are displayed with the reduced number of intensity levels as described above.

Figure 4 shows the most important elements of an image display apparatus according to the invention. The image display apparatus 400 has a receiving means 402 for receiving a signal representing the image to be displayed. This signal may be a broadcast signal received via an antenna or cable but may also be a signal from a storage device like a VCR (Video Cassette Recorder). The image display apparatus can then be implemented as a traditional television receiver. The signal may also be generated by a computer, like a Personal Computer, and the image display apparatus may then be a monitor for that



computer. The image display apparatus 400 also has an image processing unit 404 for processing the image and a display device 406 for displaying the processed image. The display device 406 is of a type that is driven in sub-fields. The image processing unit is implemented as described in connection with Figure 3.

5           The invention has been described for an image composed of pixels, each having a given intensity level. The invention can be applied to black and white images and to color images. In a color image, a pixel has a separate intensity level for each color that is used. The selection of the combinations of sub-fields according to the invention may then be carried out for each of the colors independently.

10           It should be noted that the above-mentioned embodiments illustrate rather than limit the invention and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word 'comprising' does not exclude the presence of elements or steps other than those listed  
15 in a claim. The word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. The invention can be implemented by means of hardware comprising several distinct elements and by means of a suitably programmed computer. In the unit claims enumerating several means, several of these means can be embodied by one and the same item of hardware.

## CLAIMS:

1. A method of displaying an image on a display device in a plurality of periods called sub-fields, where the display device is capable of generating in each of the sub-fields a respective illumination level, the method comprising the steps of:
  - generating a set of combinations of sub-fields, each element of the set representing a  
5       respective available illumination level,
    - for pixels of the image selecting particular combinations of sub-fields from the set in conformity with the intensity value of the respective pixels, and
    - for each of these pixels sending a representation of the selected combination of sub-fields  
10       to the display device in order to display the particular pixel,
  - 10       characterized in that the set is generated while limiting a difference regarding sub-fields between a first one of the combinations representing a first available illumination level and a second one of the combinations representing the next higher illumination level in the set, the limiting including control such that only a limited number of the sub-fields that are switched  
15       on in the first one of the combinations is not switched on in the second one of the combinations.
2. A method as claimed in Claim 1, wherein the limiting includes control such that only two of the sub-fields that are switched on in the first one of the combinations are not  
20       switched on in the second one of the combinations.
3. A method as claimed in Claim 1, wherein the limiting includes control such that only one of the sub-fields that are switched on in the first one of the combinations is not  
switched on in the second one of the combinations.
- 25       4. A method as claimed in Claim 1, wherein a first sub-field is switched on in the first one of the combinations and not switched on in the second one of the combinations, wherein a second sub-field is not switched on in the first one of the combinations and switched on in the second one of the combinations, and wherein the first sub-field and the second sub-field are temporally adjacent.

5. A method as claimed in Claim 1, wherein the available illumination levels are substantially uniformly spaced on a perceptual scale.

5 6. A method as claimed in Claim 5, wherein the perceptual scale is substantially defined according to the function  $L = x^\gamma$ , in which  
L is the perceived luminance,  
x is the number of the available illumination level in the set, and  
10  $\gamma$  is a constant of a value between 2 and 3.

10 7. A method as claimed in Claim 1,  
wherein a complementary set of combinations of sub-fields is generated to increase the number of available illumination levels, which complementary set is not limited regarding the changes between particular ones of the combinations, the original set and the  
15 complementary set together forming an overall set of available illumination levels,  
wherein it is examined whether there is motion between the image and a preceding image,  
and  
wherein, if motion is found to be present, the particular combination of sub-fields is selected  
from the original set, and if no motion is found to be present, the particular combination of  
20 sub-fields is selected from the overall set.

8. A method as claimed in Claim 1,  
wherein a complementary set of combinations of sub-fields is generated to increase the number of available illumination levels, which complementary set is not limited regarding  
25 the changes between particular ones of the combinations, the original set and the complementary set together forming an overall set of available illumination levels,  
wherein it is determined whether a particular object or area in the image is in motion between the image and a preceding image, and  
wherein for pixels of the moving object the particular combination of sub-fields is selected  
30 from the original set and for pixels of the image that do not belong to the moving object the particular combination of sub-fields is selected from the overall set.

9. An image processing unit (300) for processing an image to be displayed on a display device (406) in a plurality of periods called sub-fields, wherein the display device is

capable of generating in each of the sub-fields a respective illumination level, the image display unit (300) comprising:

- storage means (304) for storing a set of combinations of sub-fields, each element of the set corresponding to a respective available illumination level,
- 5 - selection means (310) for selecting from the set a particular combination of sub-fields in conformity with the intensity value of a particular pixel of the image, and
- sending means (312) for sending a representation of the selected combination of sub-fields to the display device (406) in order to display the particular pixel,
- 10 characterized in that in the set a difference regarding sub-fields between a first one of the combinations representing a first available illumination level and a second one of the combinations representing the next higher illumination level in the set has been limited, the limiting including control such that only a limited number of the sub-fields that are switched on in the first one of the combinations is not switched on in the second one of the combinations.

15

10. An image processing unit (300) as claimed in Claim 9, wherein in the set of available illumination levels a first sub-field is switched on in the first one of the combinations and not switched on in the second one of the combinations, wherein a second sub-field is not switched on in the first one of the combinations and switched on in the
- 20 second one of the combinations, and wherein the first sub-field and the second sub-field are temporally adjacent.

25

11. An image processing unit (300) as claimed in Claim 9, wherein the available illumination levels of the set are substantially uniformly spaced on a perceptual scale.

12. An image display apparatus (400) for displaying an image, comprising:
- receiving means (402) for receiving a signal representing the image,
  - an image processing unit (404.300) as claimed in Claim 9, 10 or 11, and
  - a display device (406) for displaying the image.

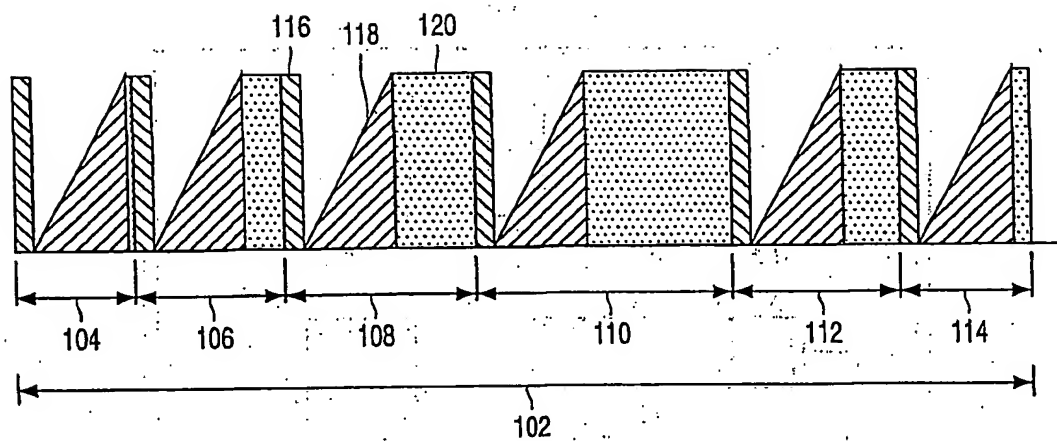


FIG. 1

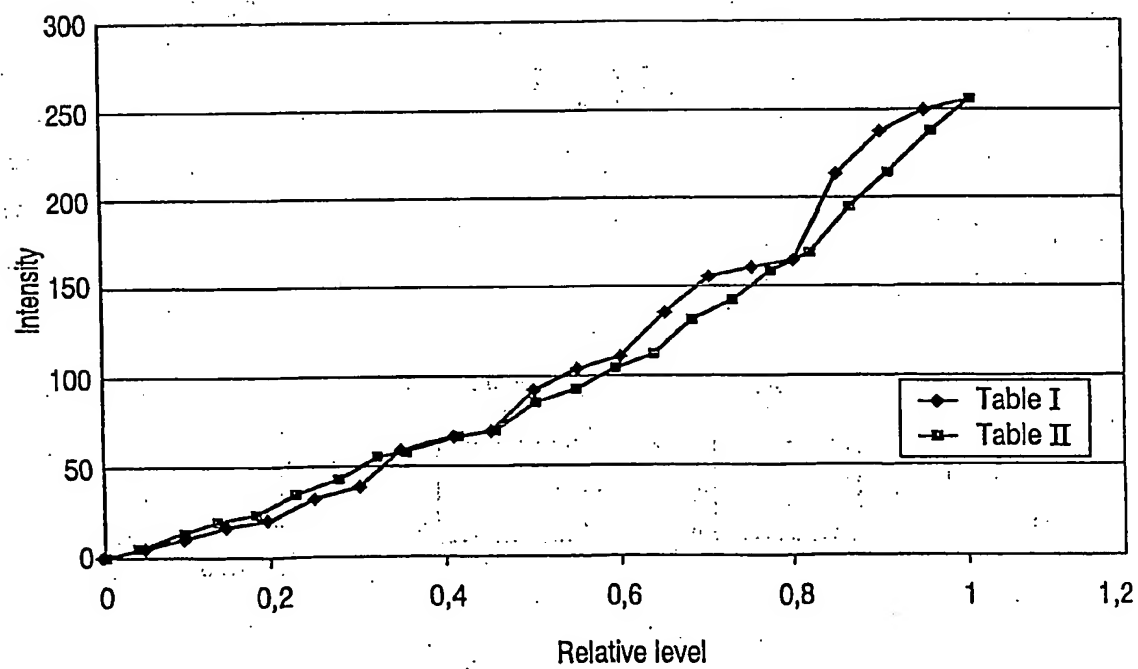


FIG. 2

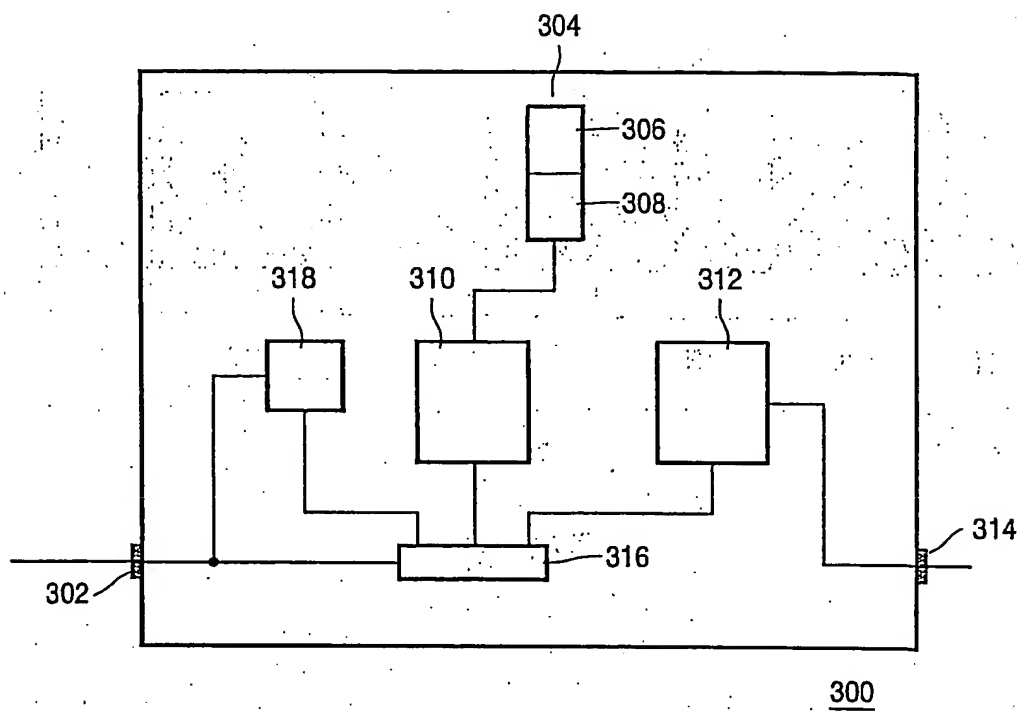


FIG. 3

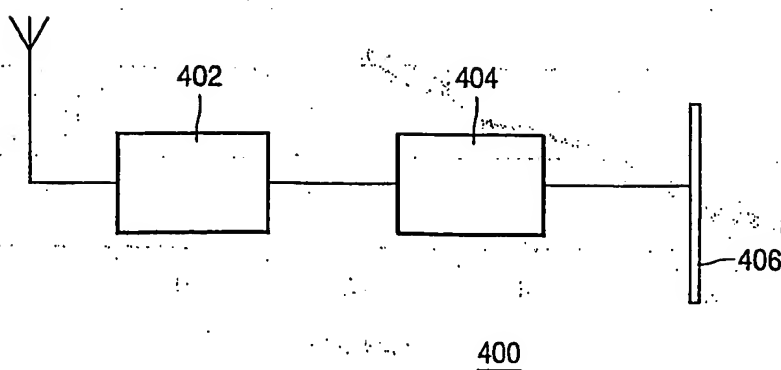


FIG. 4

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**